



DEMOLITION NOTES

- 1 REMOVE THE EXISTING WINDOW INCLUDING ALL TRIM, FLASHINGS, AND SEALANTS.
- 2 REMOVE THE EXISTING OPAQUE PANEL/FRAME. SAVE FOR RE-INSTALLATION AFTER NEW WINDOW IS INSTALLED.
- 3 REMOVE THE EXISTING WINDOW BLINDS. SAVE FOR RE-INSTALLATION AFTER NEW WINDOW IS INSTALLED.
- 4 REMOVE THE EXISTING ALUM. CURTAIN WALL, ROOF, GLASS, GUTTER, DOWNSPOUTS AND FLASHINGS. CONSTRUCT TEMPORARY CONSTRUCTION TUNNEL PRIOR TO COMMENCING DEMOLITION. EXISTING SUPERSTRUCTURE TO REMAIN IN PLACE.
- 5 REMOVE THE EXISTING DOORS AND/OR WINDOW COMPLETELY INCLUDING ALL TRIM, FLASHINGS, AND SEALANTS. PROTECT EXISTING SUPERSTRUCTURE TO REMAIN.
- 6 SEE ROOFING DRAWINGS FOR SELECT DEMO.
- 7 REMOVE THE EXISTING ALUMINUM CURTAIN WALLS AND BARREL VAULTED SKYLIGHTS
- 8 REMOVE THE EXISTING C6 STEEL CHANNEL SPANNING FROM BEAM TO BEAM.
- 9 REMOVE THE EXISTING WALL PARTITION.
- 10 REMOVE THE EXISTING MASONRY WALL TO MIN. 4" BELOW EXIST. CONC. FLOOR.
- 11 REMOVE THE EXISTING MASONRY PLANTER WALL
- 12 TEMPORARY BARRIER, SEE A2.6.
- 13 REMOVE EXISTING DOWNSPOUT COLLECTION BOX.
- 14 REMOVE EXISTING QUARRY TILE FLOORING AND SETTING BED. POLISH REMAINING CONC. FLOOR TO MATCH ADJACENT FLOOR FINISH.
- 15 SEE ROOFING DRAWINGS FOR FULL SCOPE OF ROOF RELATED DEMOLITION.
- 16 N.I.C. SEE ROOFING DRAWINGS.
- 17 DEMO PORTION OF RETAINING WALL AND SITE PAVING AS NECESSARY FOR INSTALLATION OF NEW STORM PIPING.
- 18 EXISTING SECURITY BARS MOUNTED ON INTERIOR.
- 19 DEMO EXISTING GYPSUM CEILING AS NECESSARY TO INSTALL UTILITIES. REMOVE AND REPLACE ALL MATERIALS WITH WATER DAMAGE.
- 20 PROTECT EXISTING SPIRAL DUCT IN PLACE.
- 21 PROTECT EXISTING QUARRY TILE FLOORING THROUGHOUT.
- 22 COORDINATE PROTECTION OF PLANTS IN PLANTERS.
- 23 DEMO PAVING AS NECESSARY FOR NEW STORM LINES, SEE CIVIL DWG'S.
- 24 REMOVE EXISTING FLASHING, SEALANTS, FASTENERS, ETC. FROM EXISTING MASONRY
- 25 REMOVE EXISTING COLUMN WRAP AND ANY DAMAGED FRAMING. COORDINATE WITH RENOVATION PLANS FOR EXTENT OF DEMOLITION.
- 26 DEMOLISH LOW ROOF CONNECTOR AND CLEAN EXISTING MASONRY.
- 27 REMOVE SEATING AND STORE PER OWNERS DIRECTION.
- 28 REMOVE LEAD BASED PAINT, SEE ABATEMENT DRAWINGS.
- 29 DEMO EXISTING FIRE SHUTTER.

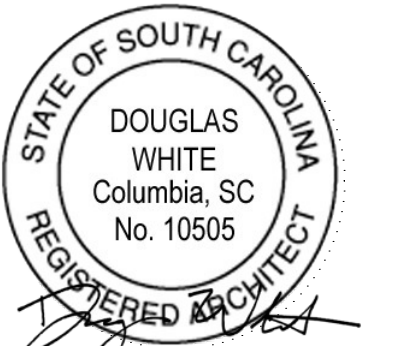

number	item	date

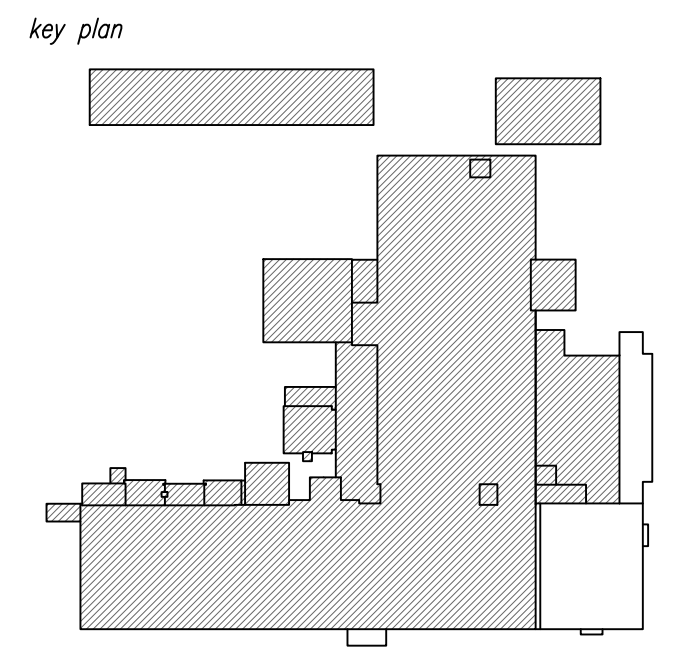

1 **ROOF DEMOLITION PLAN**
SCALE: 1/16" = 1'-0"