


Issued for  
**CONSTRUCTION DOCUMENTS**

date  
APRIL 14, 2022

number	item	date

key plan

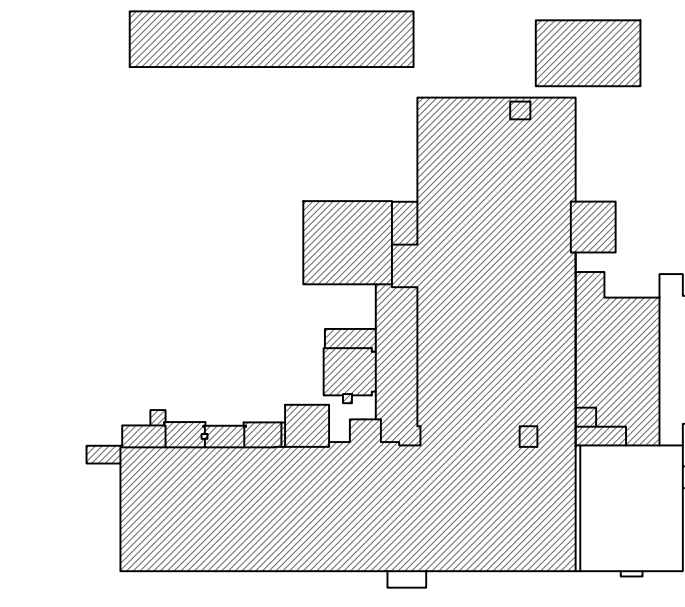


sheet title  
**FIRST AND SECOND FLOOR  
ATRIUM RENOVATION PLANS**


sheet number

**A2.6**

drawn by **DBW**  
checked by

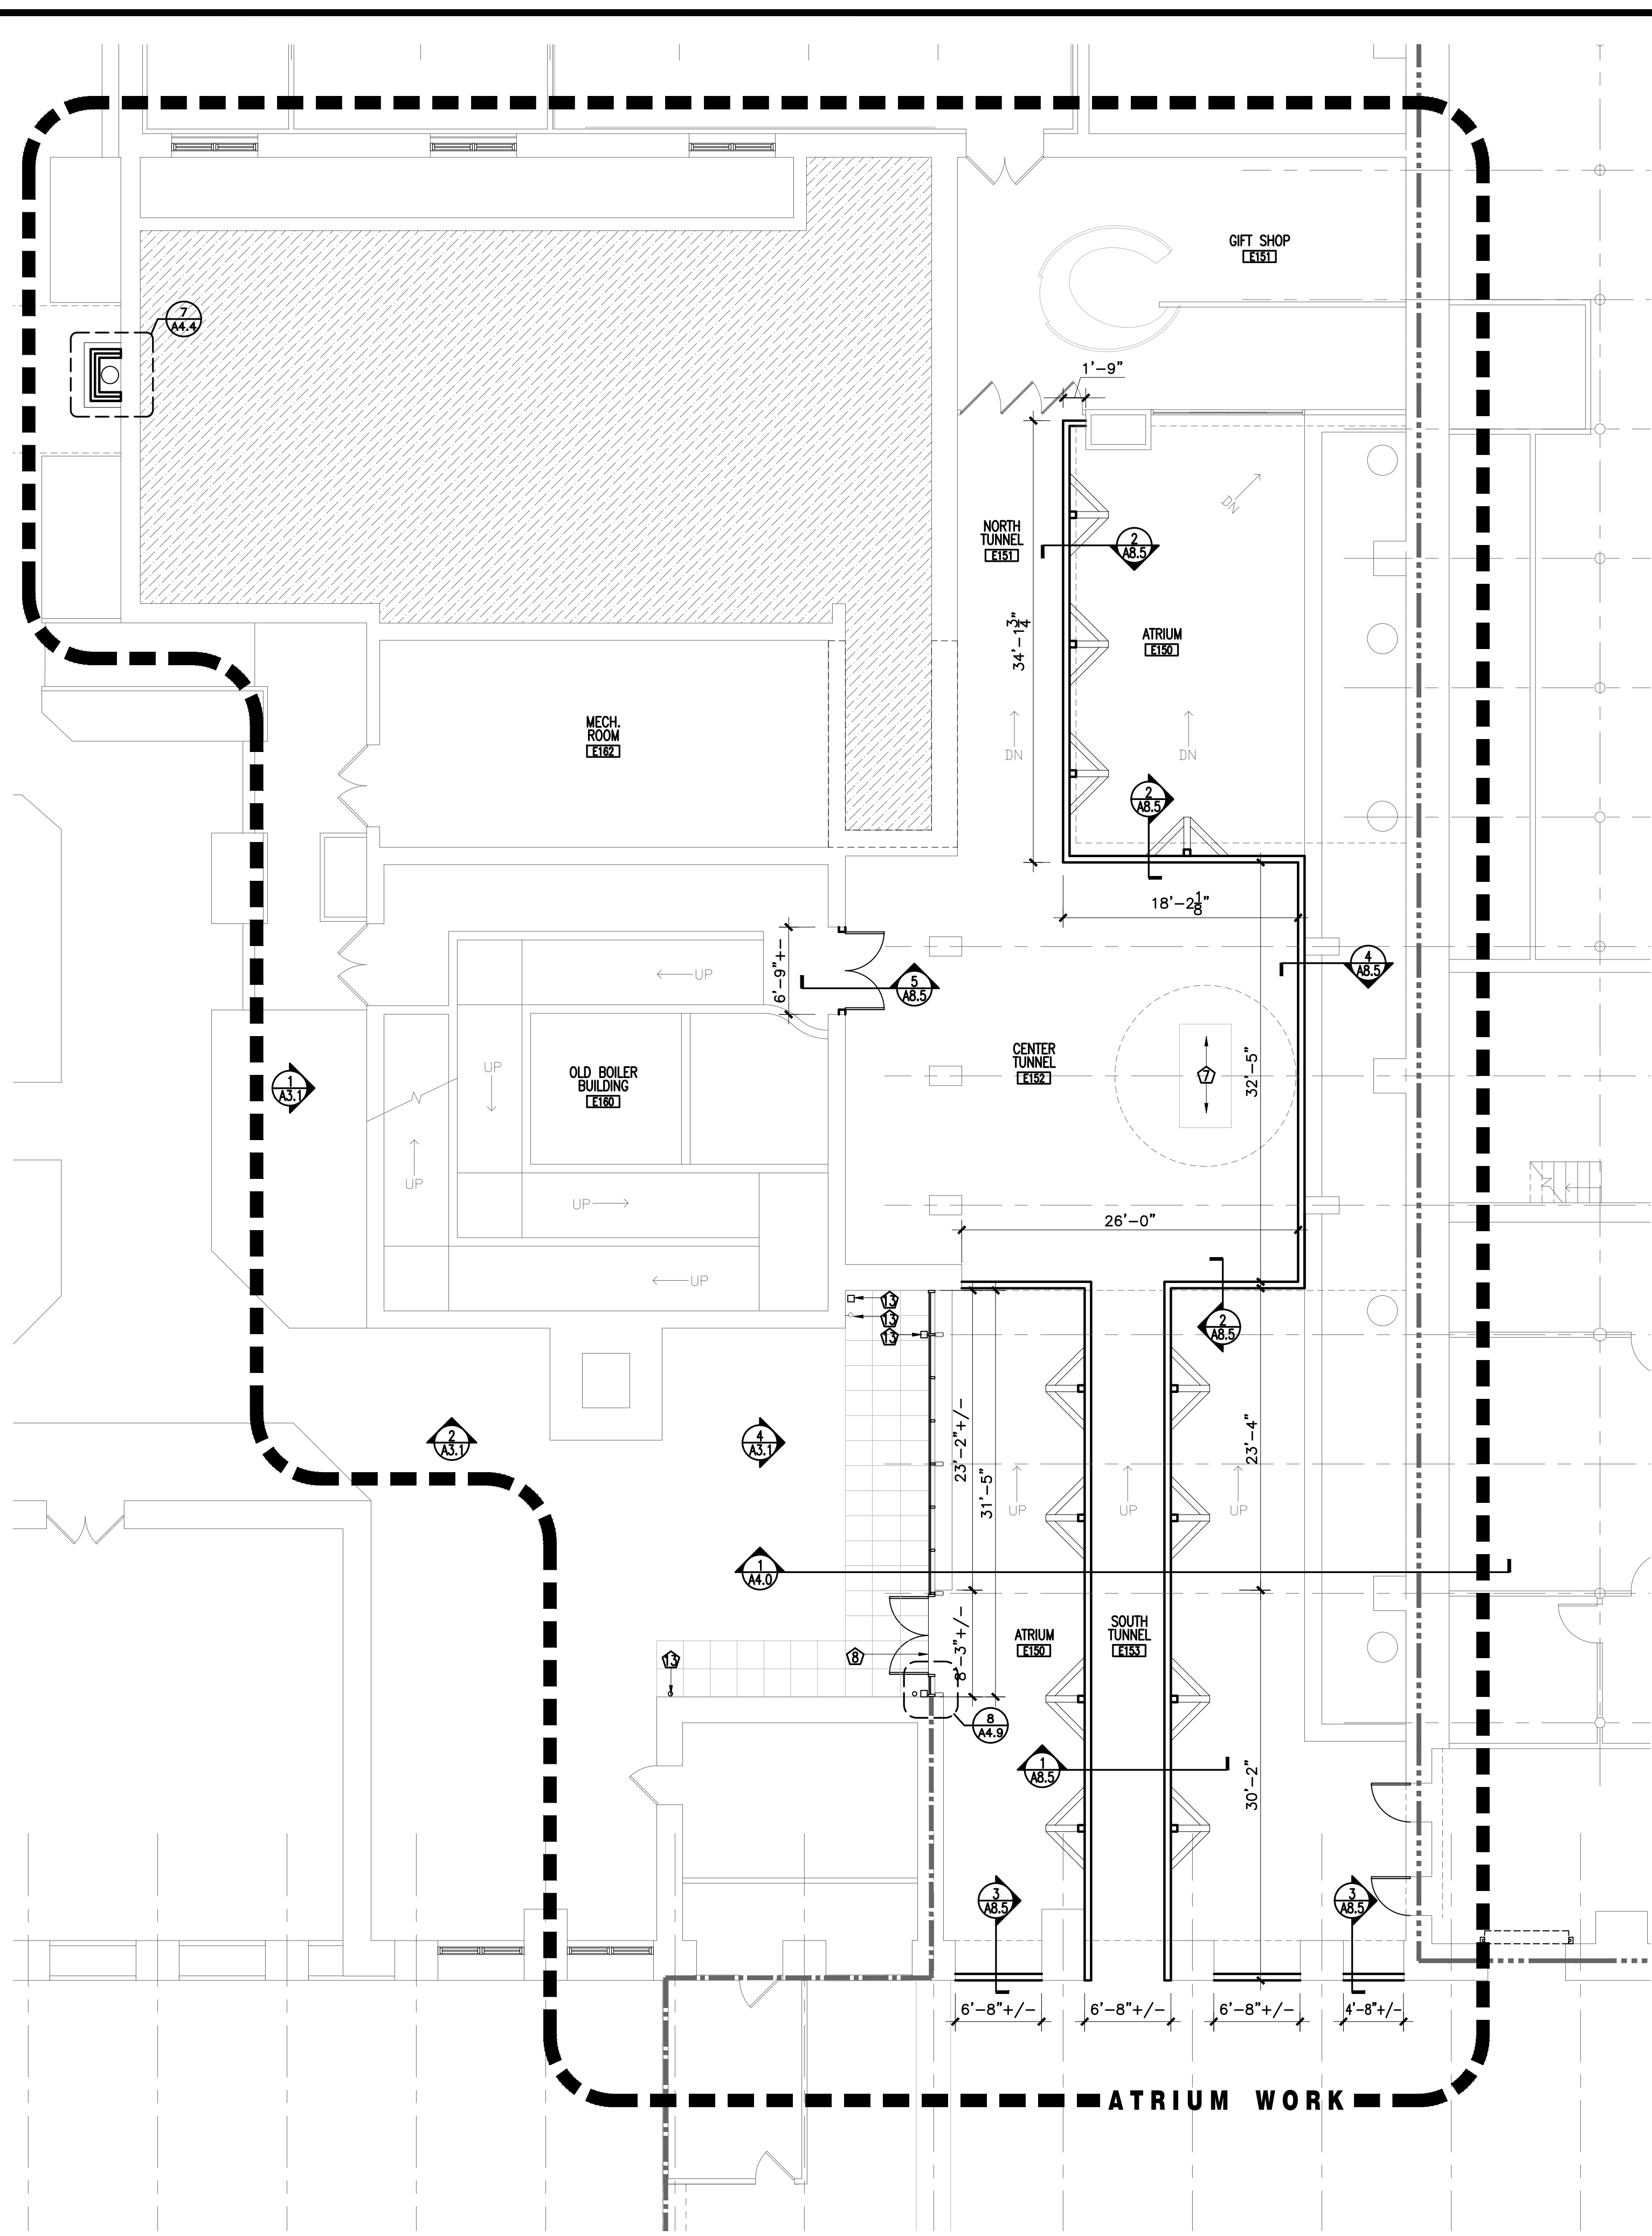

① FIRST FLOOR ATRIUM RENOVATION PLAN  
SCALE: 1/8" = 1'-0"

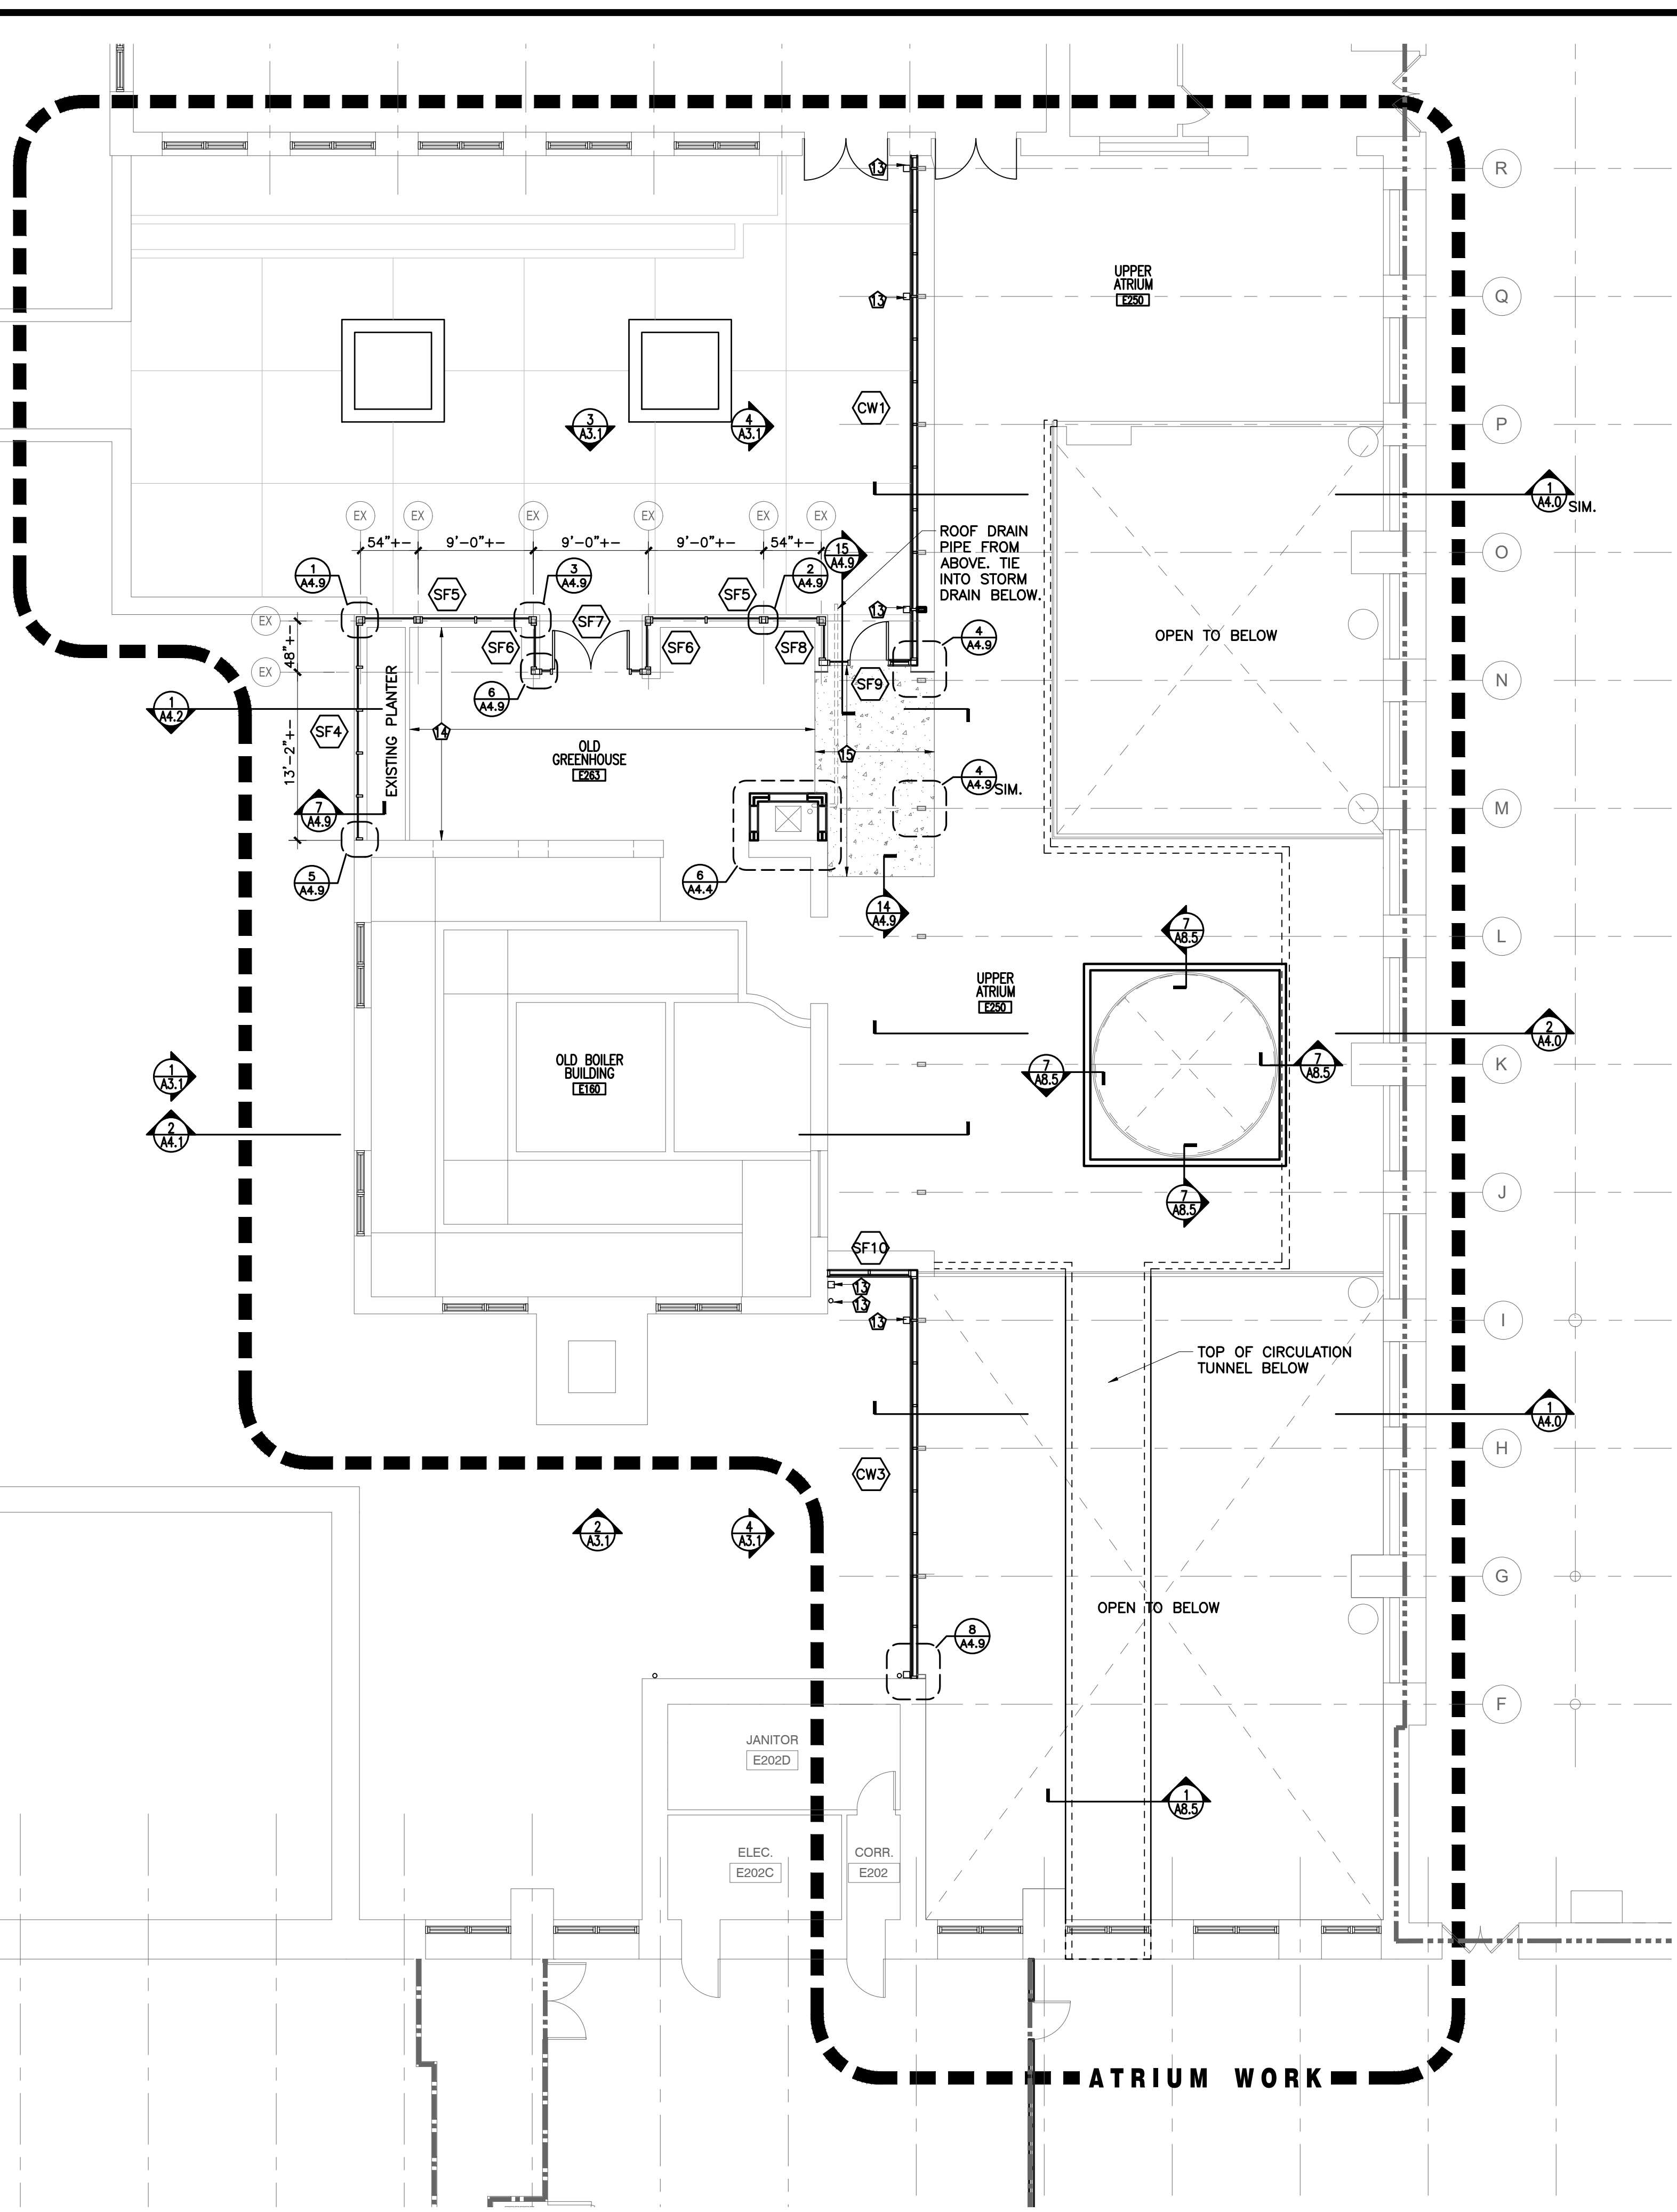

② SECOND FLOOR ATRIUM RENOVATION PLAN  
SCALE: 1/8" = 1'-0"

**RENOVATION KEYNOTES**

- ① RE-INSTALL THE EXISTING OPAQUE PANEL/FRAME AFTER WINDOW INSTALLATION IS COMPLETE.
- ② RE-INSTALL THE EXISTING WINDOW BLINDS AFTER WINDOW INSTALLATION IS COMPLETE.
- ③ REPAIR GYPSUM AND PAINT AFTER WINDOW INSTALLATION, SEE WINDOW DETAILS.
- ④ TEMPORARY CONSTRUCTION BARRIER.
- ⑤ EXISTING LOUVER TO REMAIN.
- ⑥ NEW STEEL FRAMING, SEE STRUCT. DWG'S.
- ⑦ VIETNAM DIAPHRAM EXHIBIT, PROTECT FROM DAMAGE DURING DEMOLITION AND RENOVATION ACTIVITIES.
- ⑧ NEW CONCRETE SITE PAVING, SEE CIVIL DRAWINGS.
- ⑨ EXISTING STRUCTURAL MEMBERS, WRAPPED WITH METAL FRAMING AND CYP. BD.
- ⑩ NEW PVC ROOFING ON TAPERED INSULATION, SEE ROOFING DRAWINGS. REMOVE ALL UNNECESSARY EQUIPMENT, PROTECT NEW ROOF MEMBRANE FROM ALL EXISTING TO REMAIN EQUIPMENT PER MANUFACTURER RECOMMENDATIONS.
- ⑪ NEW SSM ROOFING AND INSULATION, SEE ROOFING DRAWINGS.
- ⑫ NEW DORMER WITH STEEL AND METAL STUD FRAMING.
- ⑬ COORDINATE NEW AND EXISTING DOWNSPOUTS WITH NEW CAST IRON STORM DRAINAGE BOOTS, SEE CIVIL DRAWINGS.
- ⑭ GRIND SMOOTH AND POLISH CONCRETE SLAB FLOOR AFTER QUARRY TILE REMOVAL.
- ⑮ NEW CONCRETE SLAB PATCH, POLISH TO MATCH ADJACENT FLOORS.
- ⑯ SAND, PRIME, AND PAINT EXISTING DOOR.
- ⑰ NEW ROOF LADDER/STAIR, SEE A4.4 FOR DETAILS.
- ⑱ REPAINT CEILING.
- ⑲ OVERHEAD FIRE SHUTTER, SEE A4.71 FOR DETAILS.
- ⑳ NEW 3 HR RATED DOOR IN EXISTING OPENING.