


ABATEMENT GENERAL NOTES

1. Contractor shall thoroughly read all specifications, plans and abatement documents (i.e. ACM and LBP Reports) prior to the commencement of abatement activities.
2. Contractor shall be responsible for verification of all site conditions and quantities associated with the abatement prior to the bid. Contractor shall utilize estimated ACM quantities listed herein for the base bid. Actual quantities shall be documented and confirmed during the abatement by contractor and the owners representative.
3. Contractor shall thoroughly clean all areas and surfaces throughout where abatement is to occur prior to starting abatement activities. All finishing surfaces shall be cleaned, HEPA vacuumed and wet wiped prior to establishing containment to the satisfaction of the Owner's Representative.
4. Contractor is to ensure that all governing EPA, SCDHEC and OSHA regulations are followed during the abatement of the facility.
5. Contractor to remove ACM flashing, as designated below, from around the perimeter of roof mechanical equipment footers, and any roof penetration. Contractor shall remove, handle, and dispose of ACM per SCDHEC regulations.

ACM Flashing to be Removed by Abatement Contractor

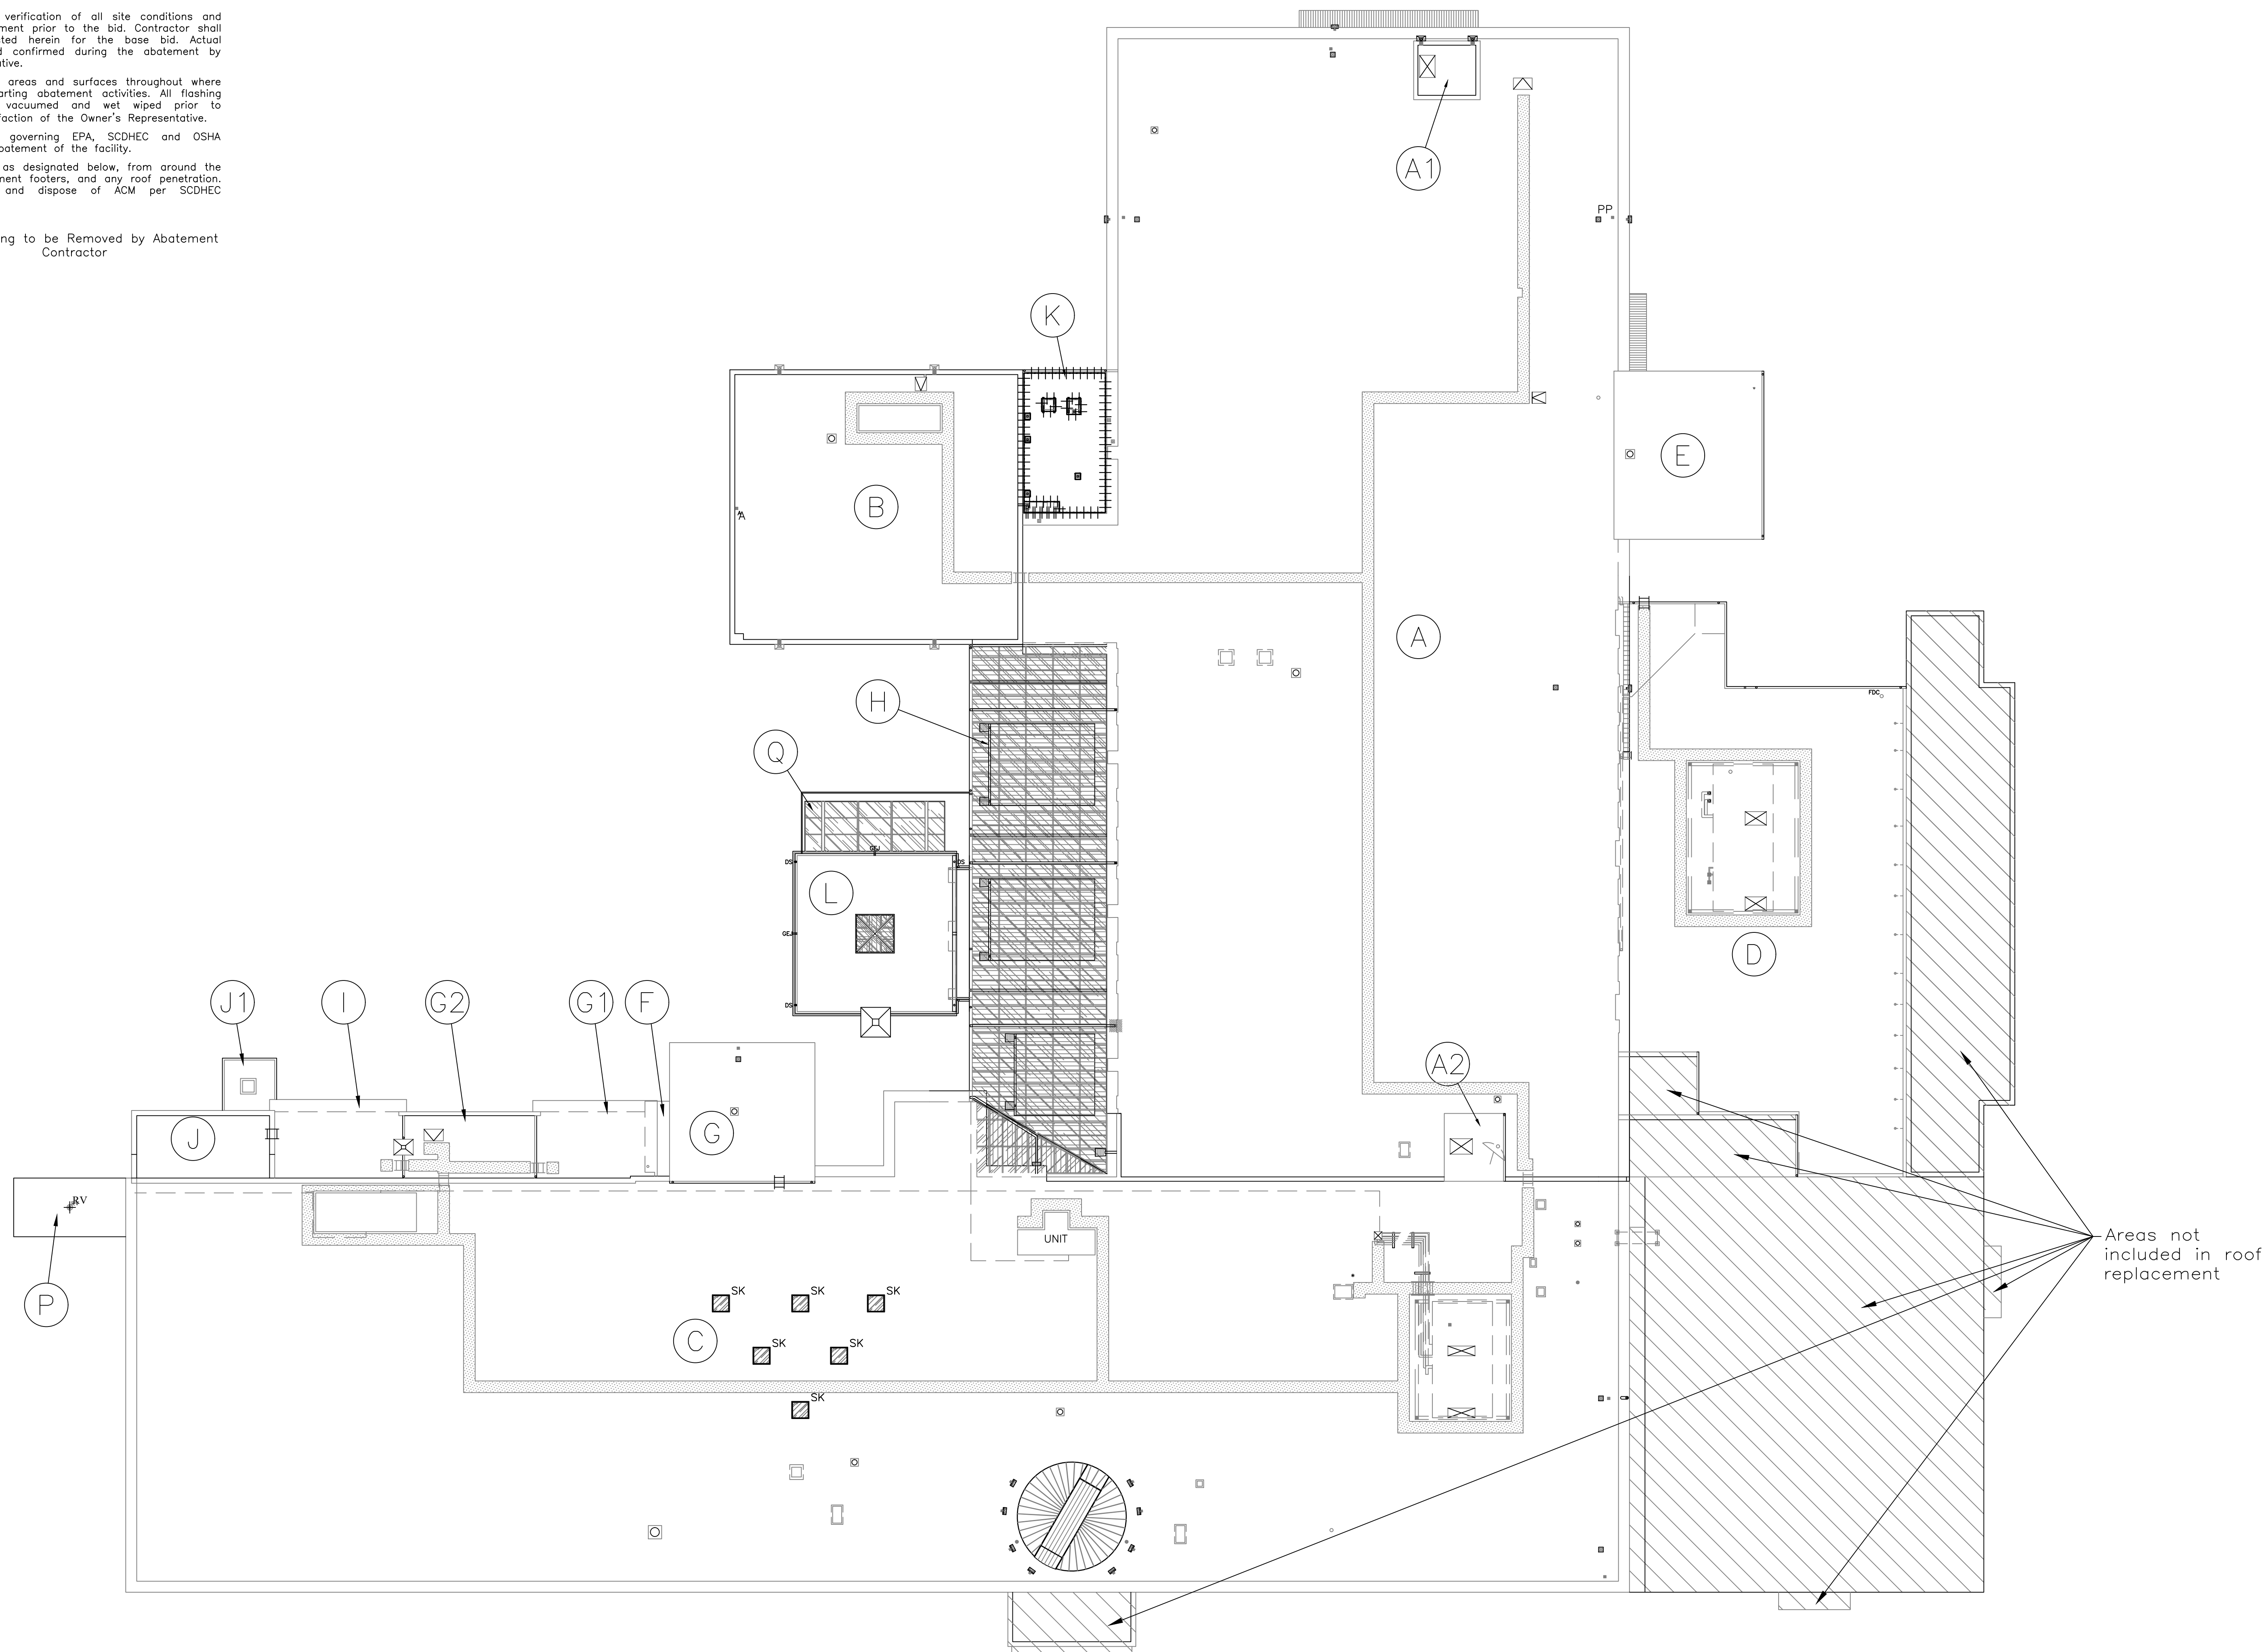

Areas not included in roof replacement

8 ROOF ABATEMENT PLAN
SCALE: 1" = 20'-0"

consultants

F&ME
Consultants
1825 Blanding Street
Columbia, SC
29201
803.254.4540
www.fmeconsultants.com

client

admin
THE SOUTH CAROLINA
DEPARTMENT of ADMINISTRATION

THE SOUTH CAROLINA
DEPARTMENT OF
ADMINISTRATION
State Project #D50-6037-PD

project name
COLUMBIA MILLS ROOF
REPLACEMENT & ATRIUM ROOF/
WINDOW REPLACEMENT


A/E project number
20058.01

scale/signature

issued for
CONSTRUCTION DOCUMENTS

date
APRIL 18, 2022

number	item	date

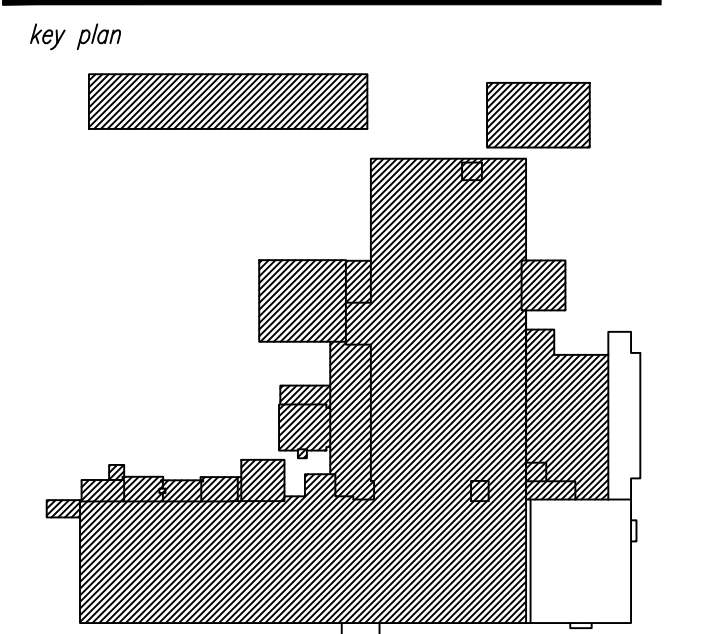

key plan

sheet title
ACM ROOF ABATEMENT PLAN

sheet number

AB-5.0

drawn by MSM
checked by GME