


**DRAWING LEGEND**


- XX ROOF DESIGNATION
- RD ROOF DRAIN
- RD/CH/DS ROOF DRAIN TO CONDUCTOR HEAD TO DOWNSPOUT
- DS DRAIN SCUPPER TO CONDUCTOR HEAD AND DS
- DS DRAIN SCUPPER
- DS DOWNSPOUT
- PP PITCH PAN
- FDC FIRE DEPARTMENT CONNECTION
- HS HOT STACK
- GN/HS HOT STACK WITH GOOSE NECK
- VTR VENT THROUGH ROOF
- WH WEATHER HEAD
- UNIT MECHANICAL / HVAC UNIT
- DUCT PENETRATION / CURB
- GRAVITY VENT
- ABANDONED CHIMNEY
- ROOF HATCH / ACCESS
- SK SKYLIGHT
- SLOPED GLAZING PANEL SYSTEM
- DUCT PENETRATION
- LIGHTING SYSTEM @ PP
- PERIMETER PARAPET WALL
- RME PERIMETER
- SATELLITE
- MECHANICAL UNIT ON SLEEPERS
- VENTILATOR
- ROOF TIE-DOWN
- LADDER
- APPROXIMATE LOCATION OF NEW ROOF WALKPADS

**NOTES:**

1. ALL LOW SLOPED ROOFING SYSTEMS ARE TO BE REMOVED DOWN TO THE EXISTING ROOF DECK SYSTEMS PRIOR TO NEW LOW SLOPED ROOFING SYSTEM INSTALLATION.
2. ALL EQUIPMENT TO BE RAISED TO PROVIDE A MINIMUM BASE FLASHING HEIGHT OF 8" OR GREATER FROM TOP OF FINISH ROOF SURFACE.
3. ALL ABANDONED ROOF TOP EQUIPMENT TO BE REMOVED WITH THE ROOF DECK BEING PATCHED AS REQUIRED. REFER TO STRUCTURAL DRAWINGS FOR SUPPLEMENTAL FRAMING FOR NEW DECKING.
4. WALK PADS ARE REQUIRED WHERE SHOWN ON DRAWINGS.
5. TAPER CRICKETS TO BE INSTALLED AT HIGH SIDE OF ALL ROOF CURB PENETRATIONS.
6. TAPERED CRICKETS TO BE INSTALLED WITH A 2 TO 1 LENGTH RATIO.
7. MINIMUM 4'X4' TAPERED SUMP TO BE PROVIDED AT PRIMARY ROOF DRAINS.

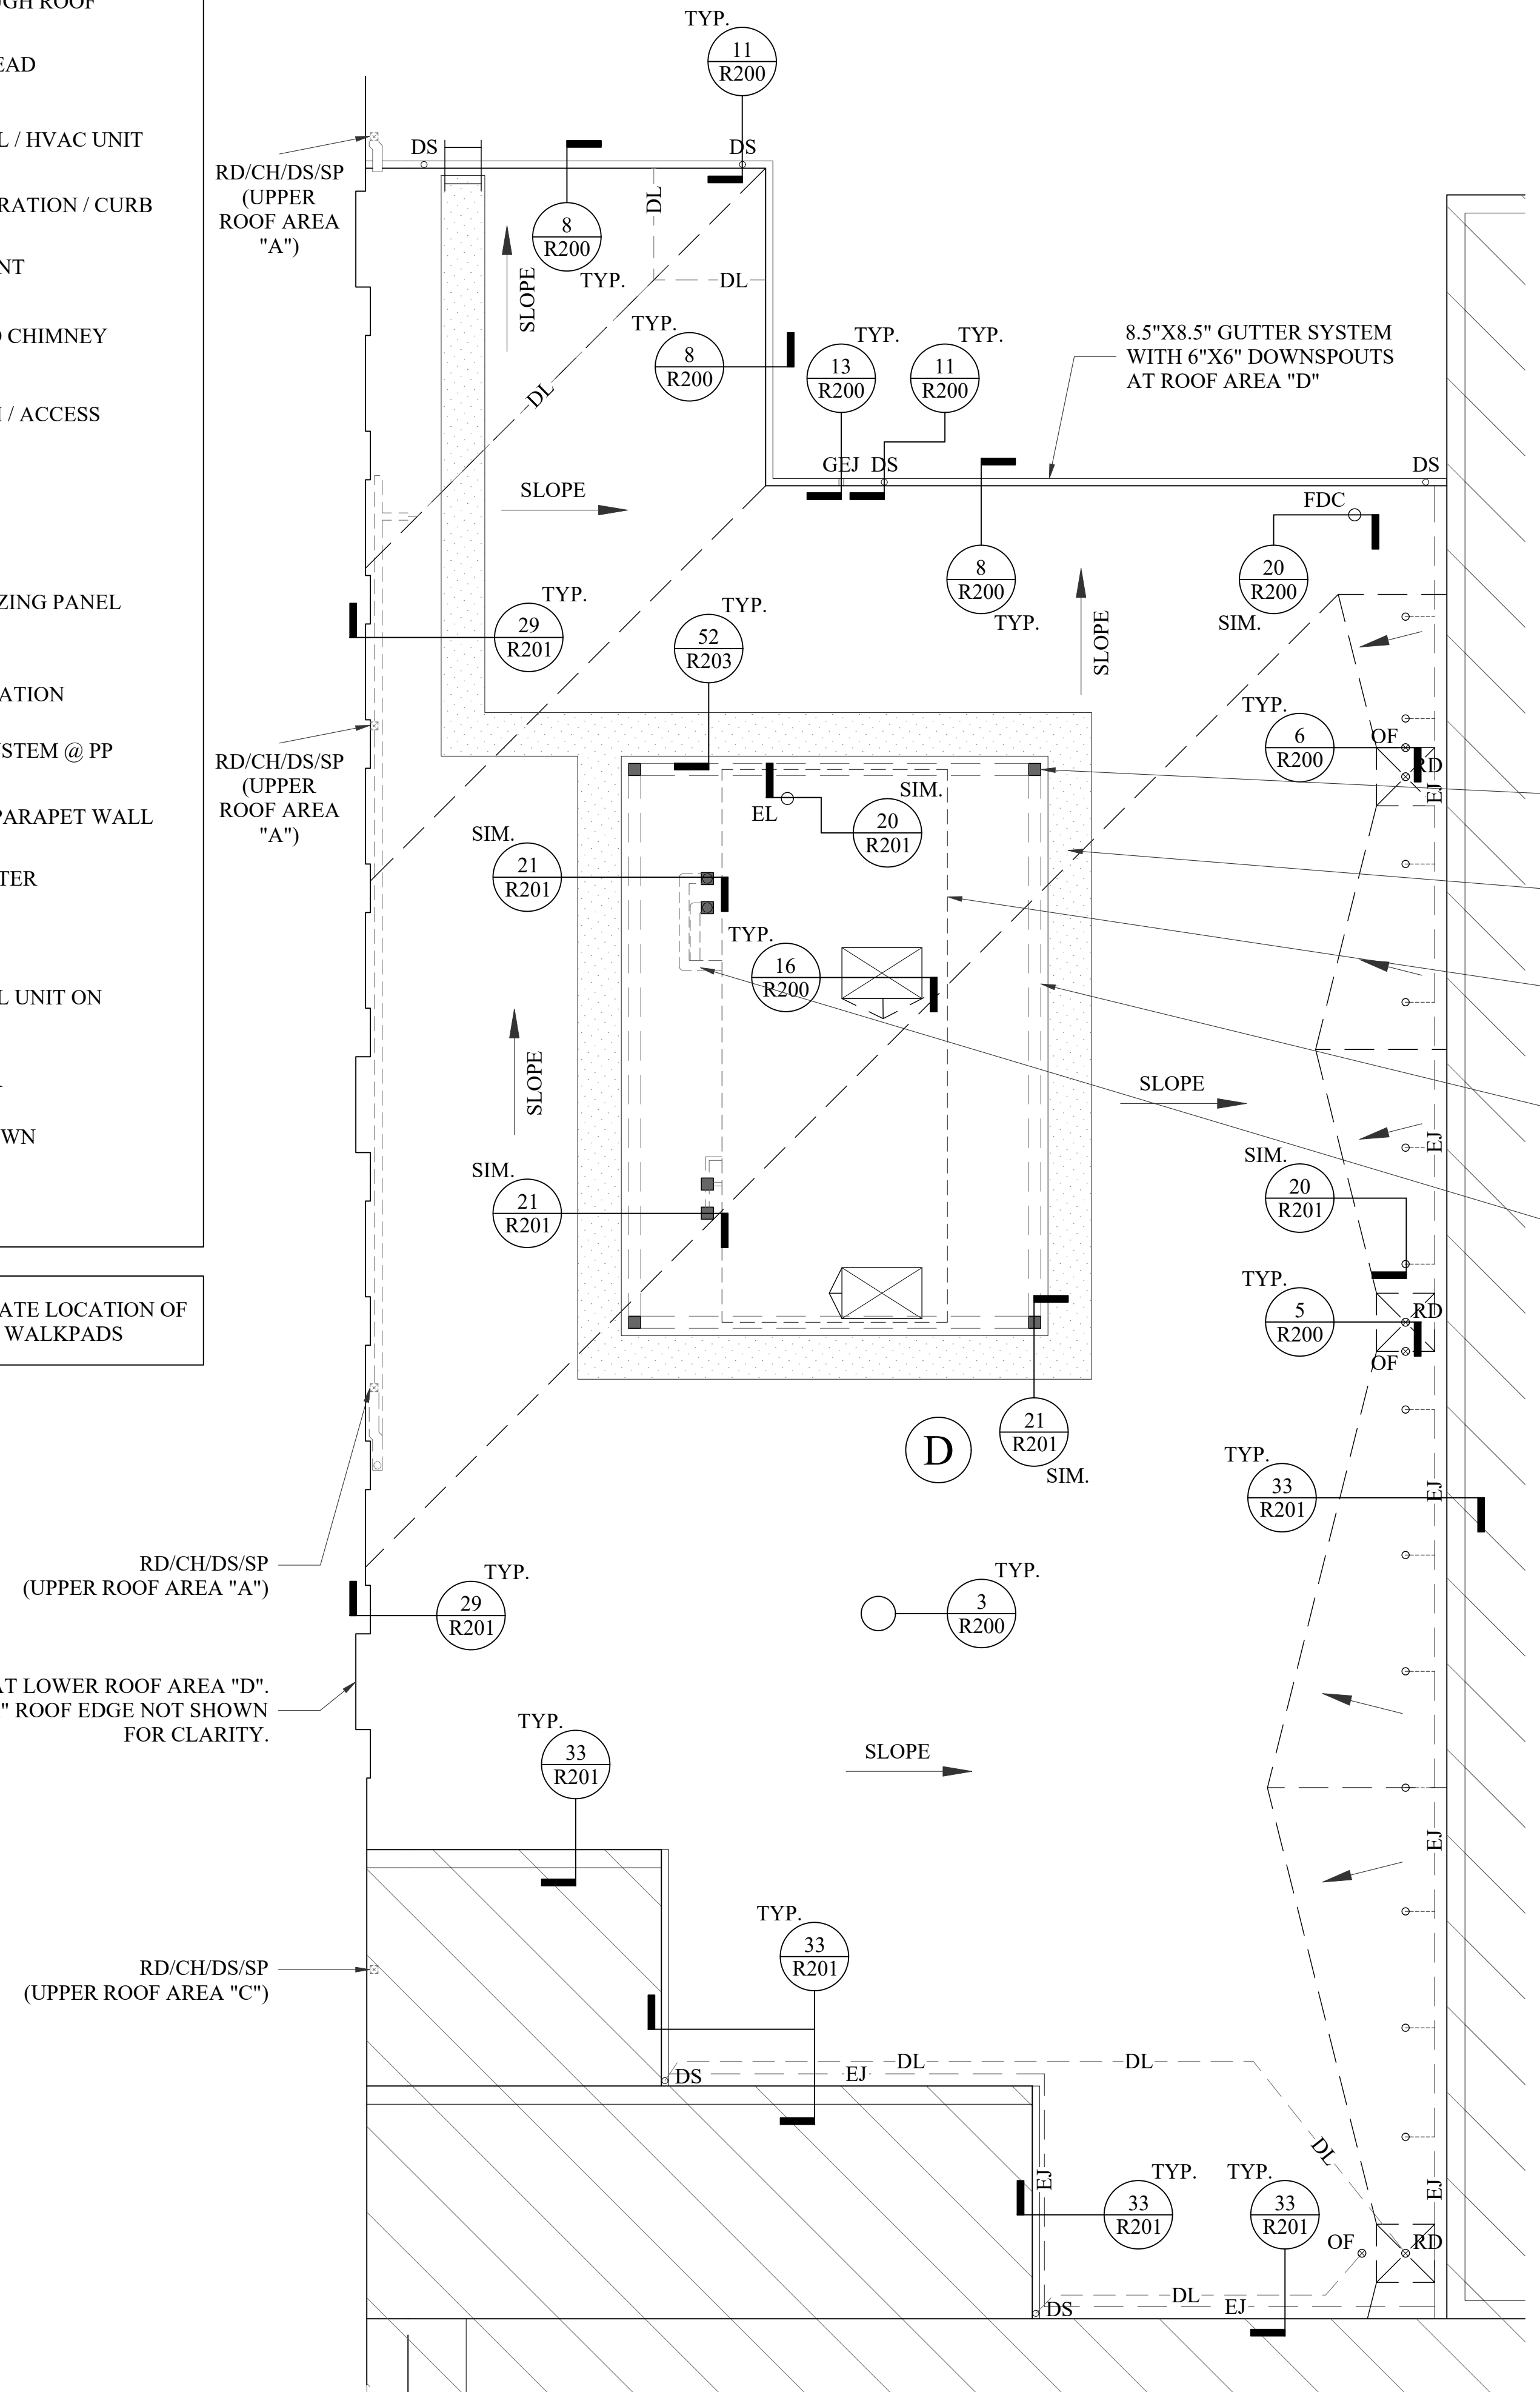

**E PARTIAL NEW ROOF PLAN - AREA "D"**  
1/8" = 1'-0"

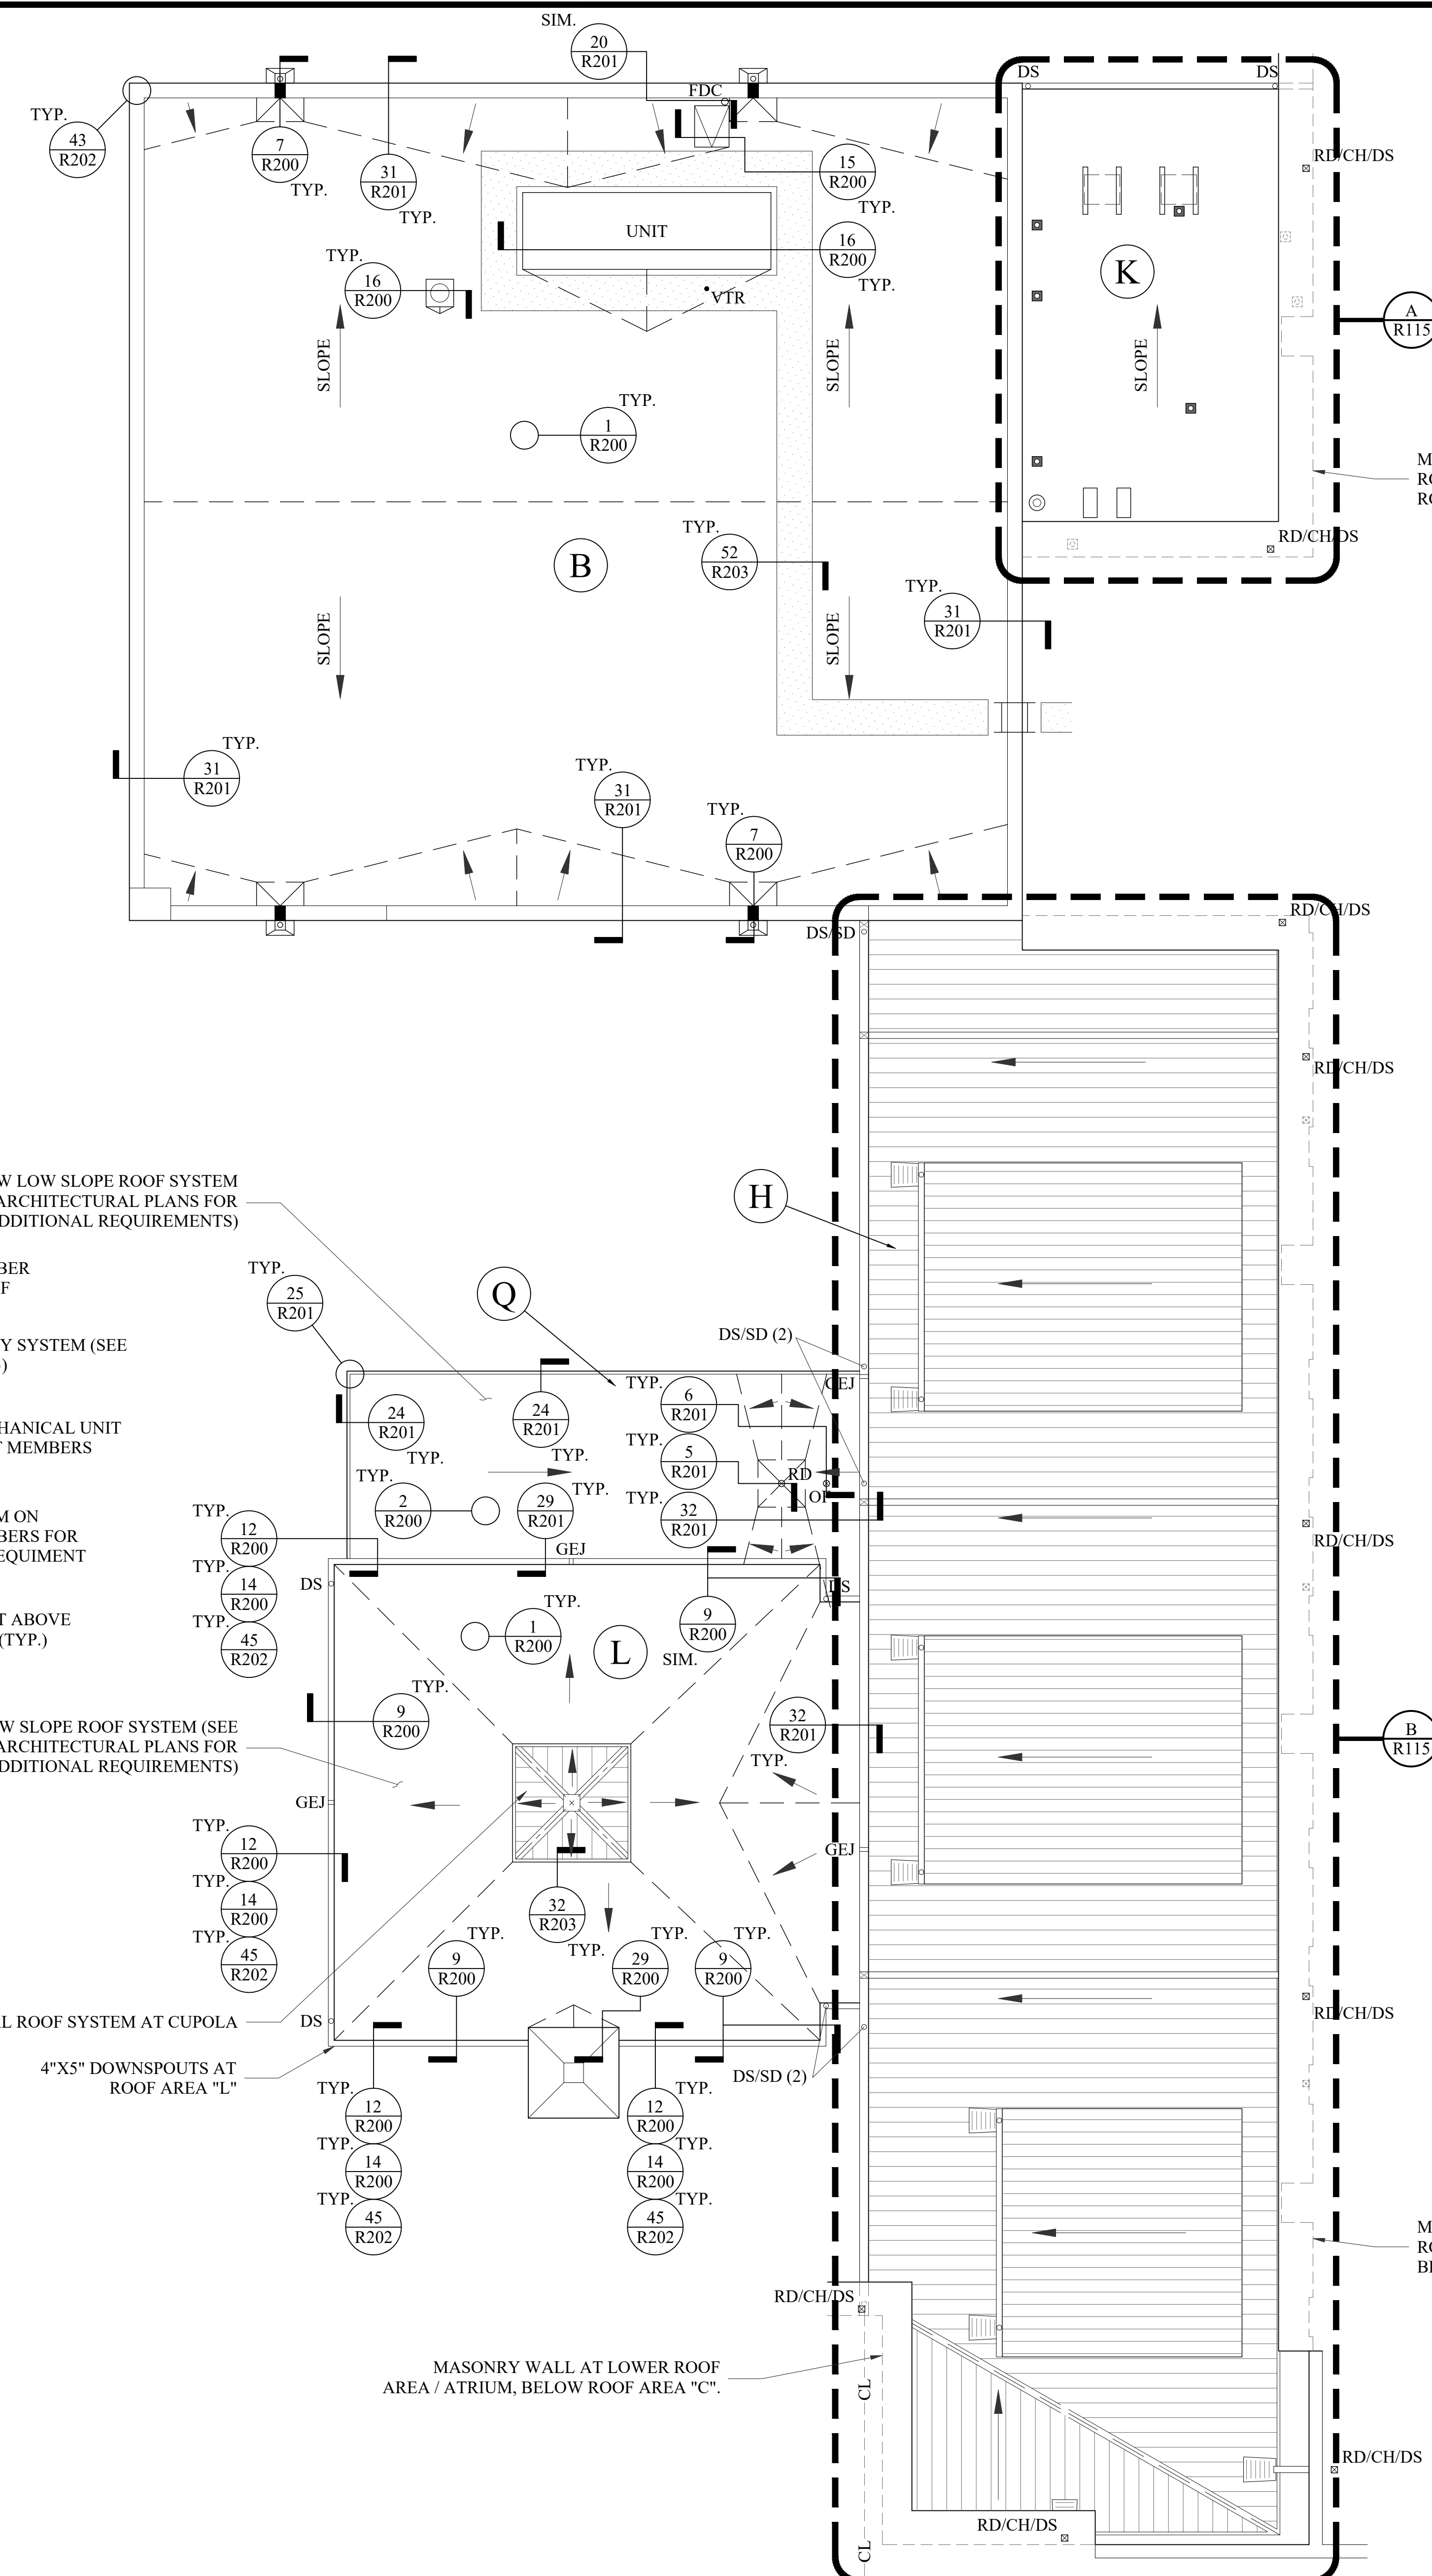

**F PARTIAL NEW ROOF PLAN - AREA "B", "H", "K", "L", "M" AND "Q"**  
1/8" = 1'-0"

number	item	date

